


Model : **US08c**
 Description : DC Current to DC Current Isolation Transducer

Utilization:


The HOKKIM US08c is able to transduce input DC current of 4 to 20mA into output DC current of 4 to 20 mA. The impedance of the current output load should be less than 500Ω .

There is a span adjustment to calibrate the output to 20mA dc when input is maximum at 20mA dc. Input is isolated from output.

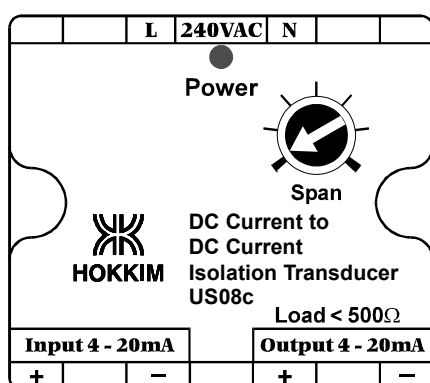


Technical Data


Supply Voltage	☐ 240VAC ☐ 115VAC ☐ 24VDC ☐ 12VDC
Frequency	50~60Hz for AC Supply
Consumption	<2VA
Input Current	4 – 20mA dc
Output Current	4 – 20mA dc
Output Load Impedance	<500Ω
Accuracy	±2% at full span
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3KV
Output & Supply Circuit	3KV
Input & Output Circuit	3KV

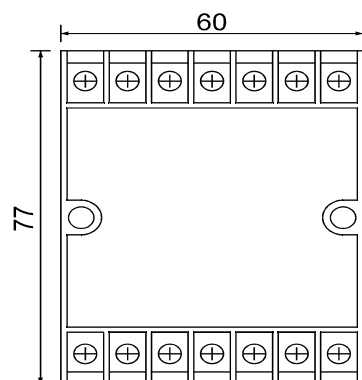

Top View
 Dimensions in mm

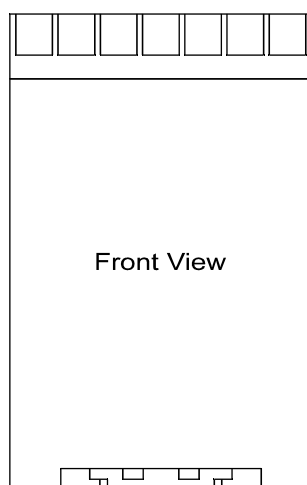

Front View

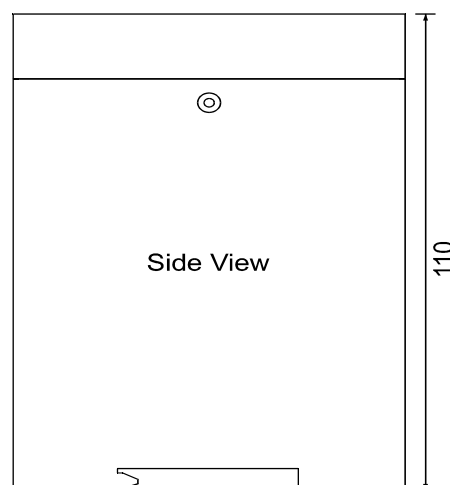

Side View