


Model : **US11c**
 Description : DC Voltage to DC Current Isolation Transducer

Utilization:

The HOKKIM US11c is able to transduce input DC voltage of 0 to 20V into output DC current of 4 to 20mA. The impedance of the current output load should be less than 500Ω.

There is a zero adjustment to calibrate the output to 4mA dc when input is at 0V dc. Another span adjustment to calibrate the output to 20mA dc when input is maximum at 20V dc. Input is isolated from output.

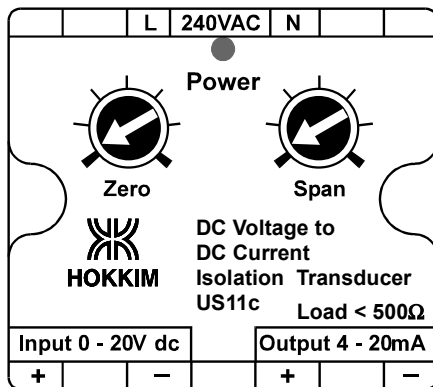

Technical Data

Supply Voltage	☐ 240VAC ☐ 115VAC ☐ 24VDC ☐ 12VDC
Frequency	50~60Hz for AC Supply
Consumption	<2A
Input Voltage	0 - 20V dc
Output Current	4 – 20mA dc
Accuracy	±2% at full span
Output Load Impedance	<500Ω
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3KV
Output & Supply Circuit	3KV
Input & Output Circuit	3KV

