


Model : **TRD-1**
 Function : Telephone Ring Detector

Utilization:


The TRD-1 is design for connection in parallel to a telephone. When an incoming call rings the telephone, the internal relay of the TRD-1 will energize. This can be used to switch on any appropriate devices like sirens or lights.

Contacts 8-6 open in the dormant condition and close when the telephone is ringing. A red LED will indicate the ringing mode.

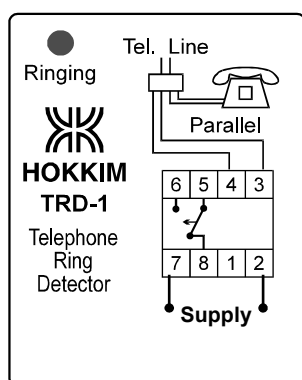


Technical Data

Supply Voltage	: □240VAC □115VAC □24VDC □12VDC
Consumption	: 1VA
Indication	: Red LED (Ringing)
Output Contacts	: 5A 240V 50Hz AC1
	Dormant: 8-5 Close 8-6 Open
	Ringing: 8-5 Open 8-6 Close

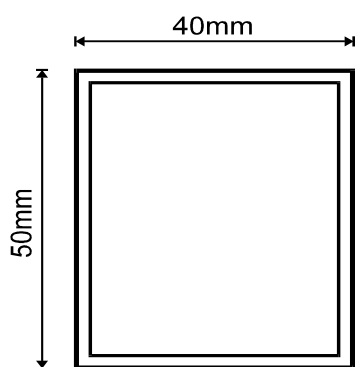


Dimensions

Top View

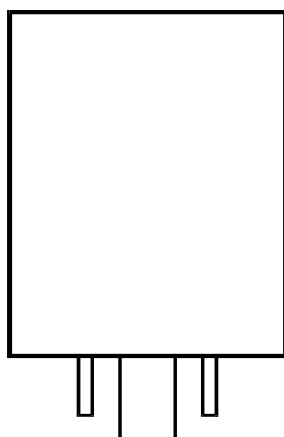

Front View

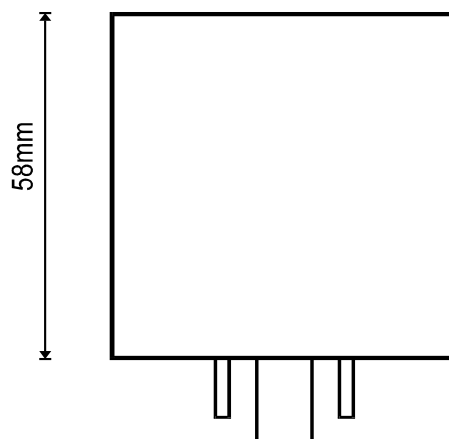

Side View