


Model : **U06c**
 Description : Frequency to DC Current Transducer.

Utilization:

The HOKKIM U06c is able to transduce input Frequency of 0 to 10KHz into output DC current of 4 to 20mA. The impedance of the current output load should be less than 500Ω.

There is a zero adjustment to calibrate the output to 4mA dc when input is at 0KHz. Another span adjustment to calibrate the output to 20mA dc when input is maximum at 10KHz.

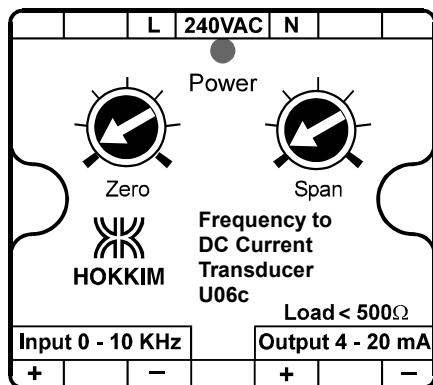

Technical Data

Supply Voltage	☐ 240VAC ☐ 115VAC ☐ 24VDC ☐ 12VDC
Frequency	50~60Hz for AC Supply
Consumption	<2VA
Input Frequency	0 - 10KHz
Output Current	4 – 20mA dc
Accuracy	±2% at full span
Output load Impedance	<500W
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3 KV
Output & Supply Circuit	3 KV

