


HOKKIM *giving you control* Control & Protection Relays

Model : **U08c**
 Description : DC Current to DC Current Transducer.

Utilization:

The U08c is able to transduce input DC current of 4 to 20mA into output DC current of 4 to 20mA. The impedance of the current output load should be less than 500Ω.

There is a span adjustment to calibrate the output to 20mA dc when input is maximum at 20mA dc.

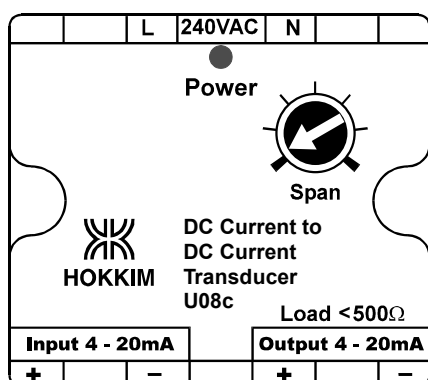

Technical Data

Supply Voltage	☐ 240VAC ☐ 115VAC ☐ 24VDC ☐ 12VDC
Frequency	50~60Hz for AC Supply
Consumption	<2VA
Input Current	4 – 20mA dc
Output Current	4 - 20mA dc
Accuracy	±2% at full span
Output Load Impedance	<500Ω.
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3KV
Output & Supply Circuit	3KV

