


Model : **U10f**
 Description : DC Voltage to DC Current Transducer

Utilization:


The HOKKIM U10f is able to transduce input DC voltage of 0 to 5V into output DC current of 2 to 11mA. The impedance of the current output load should be less than 500Ω.

There is a zero adjustment to calibrate the output to 2mA dc when input is at 0V dc. Another span adjustment to calibrate the output to 11mA dc when input is maximum at 5V dc.

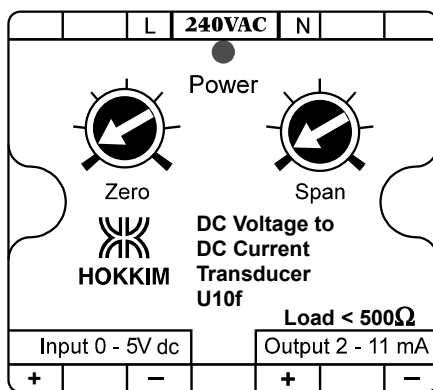

Technical Data

Supply Voltage	☐ 240VAC ☐ 115VAC ☐ 24VDC ☐ 12VDC
Frequency	50~60Hz for AC Supply
Consumption	<2VA
Input Voltage	0 – 5V dc
Output Current	2 – 11mA dc
Accuracy	±2% at full span
Output Load Impedance	<500Ω
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3KV
Output & Supply Circuit	3KV

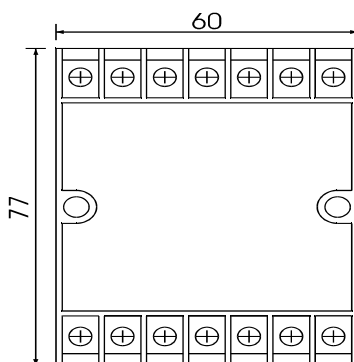

Top View
 Dimensions in mm

