


HOKKIM *giving you control* Control & Protection Relays

Model : **U15cc**
 Description : DC Voltage to Twin DC Current Transducer

Utilization:


The HOKKIM U15c is able to transduce input DC voltage of 1 to 5V dc into two outputs DC current of 4 to 20mA. The impedance of the current output load should be less than 500Ω.

There are two span adjustments to calibrate the outputs to 20mA dc when input is maximum at 5V dc.

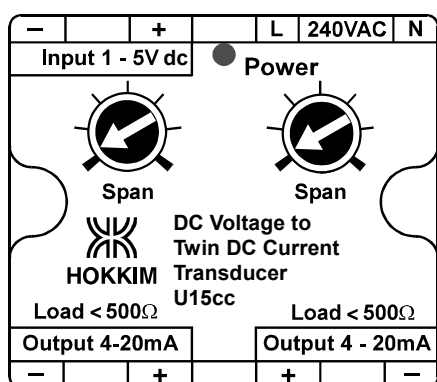


Technical Data


Supply Voltage	☐ 115VAC ☐ 240VAC ☐ 12VDC ☐ 24VDC
Frequency	50~60Hz for AC Supply
Consumption	<2VA
Input Voltage	1 – 5V dc
Output Current	4 – 20mA dc x 2
Accuracy	±2% at full span
Output load Impedance	<500Ω
Indication	Green LED (Power)
Dielectric Strength Between:	
Input & Supply Circuit	3KV
Output & Supply Circuit	3KV

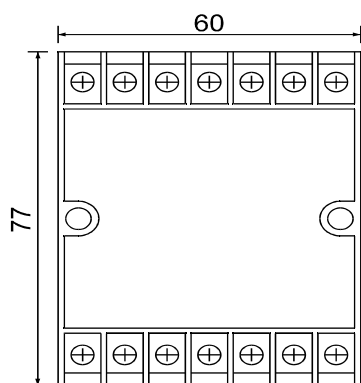

Top View
Dimensions in mm

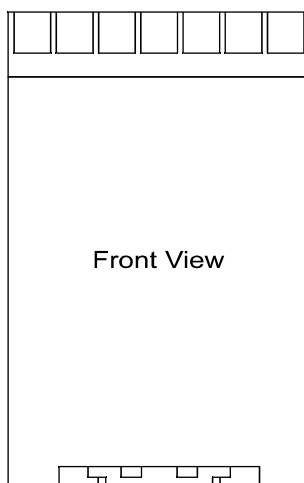

Front View

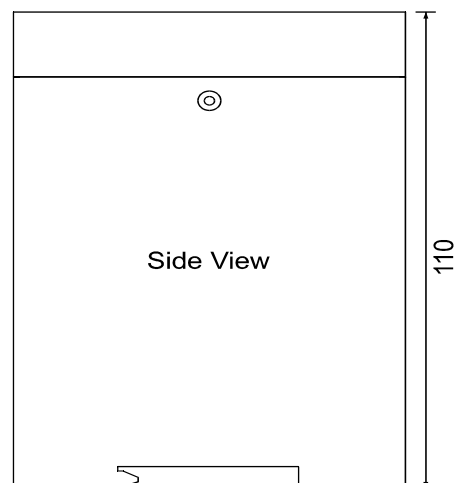

Side View